


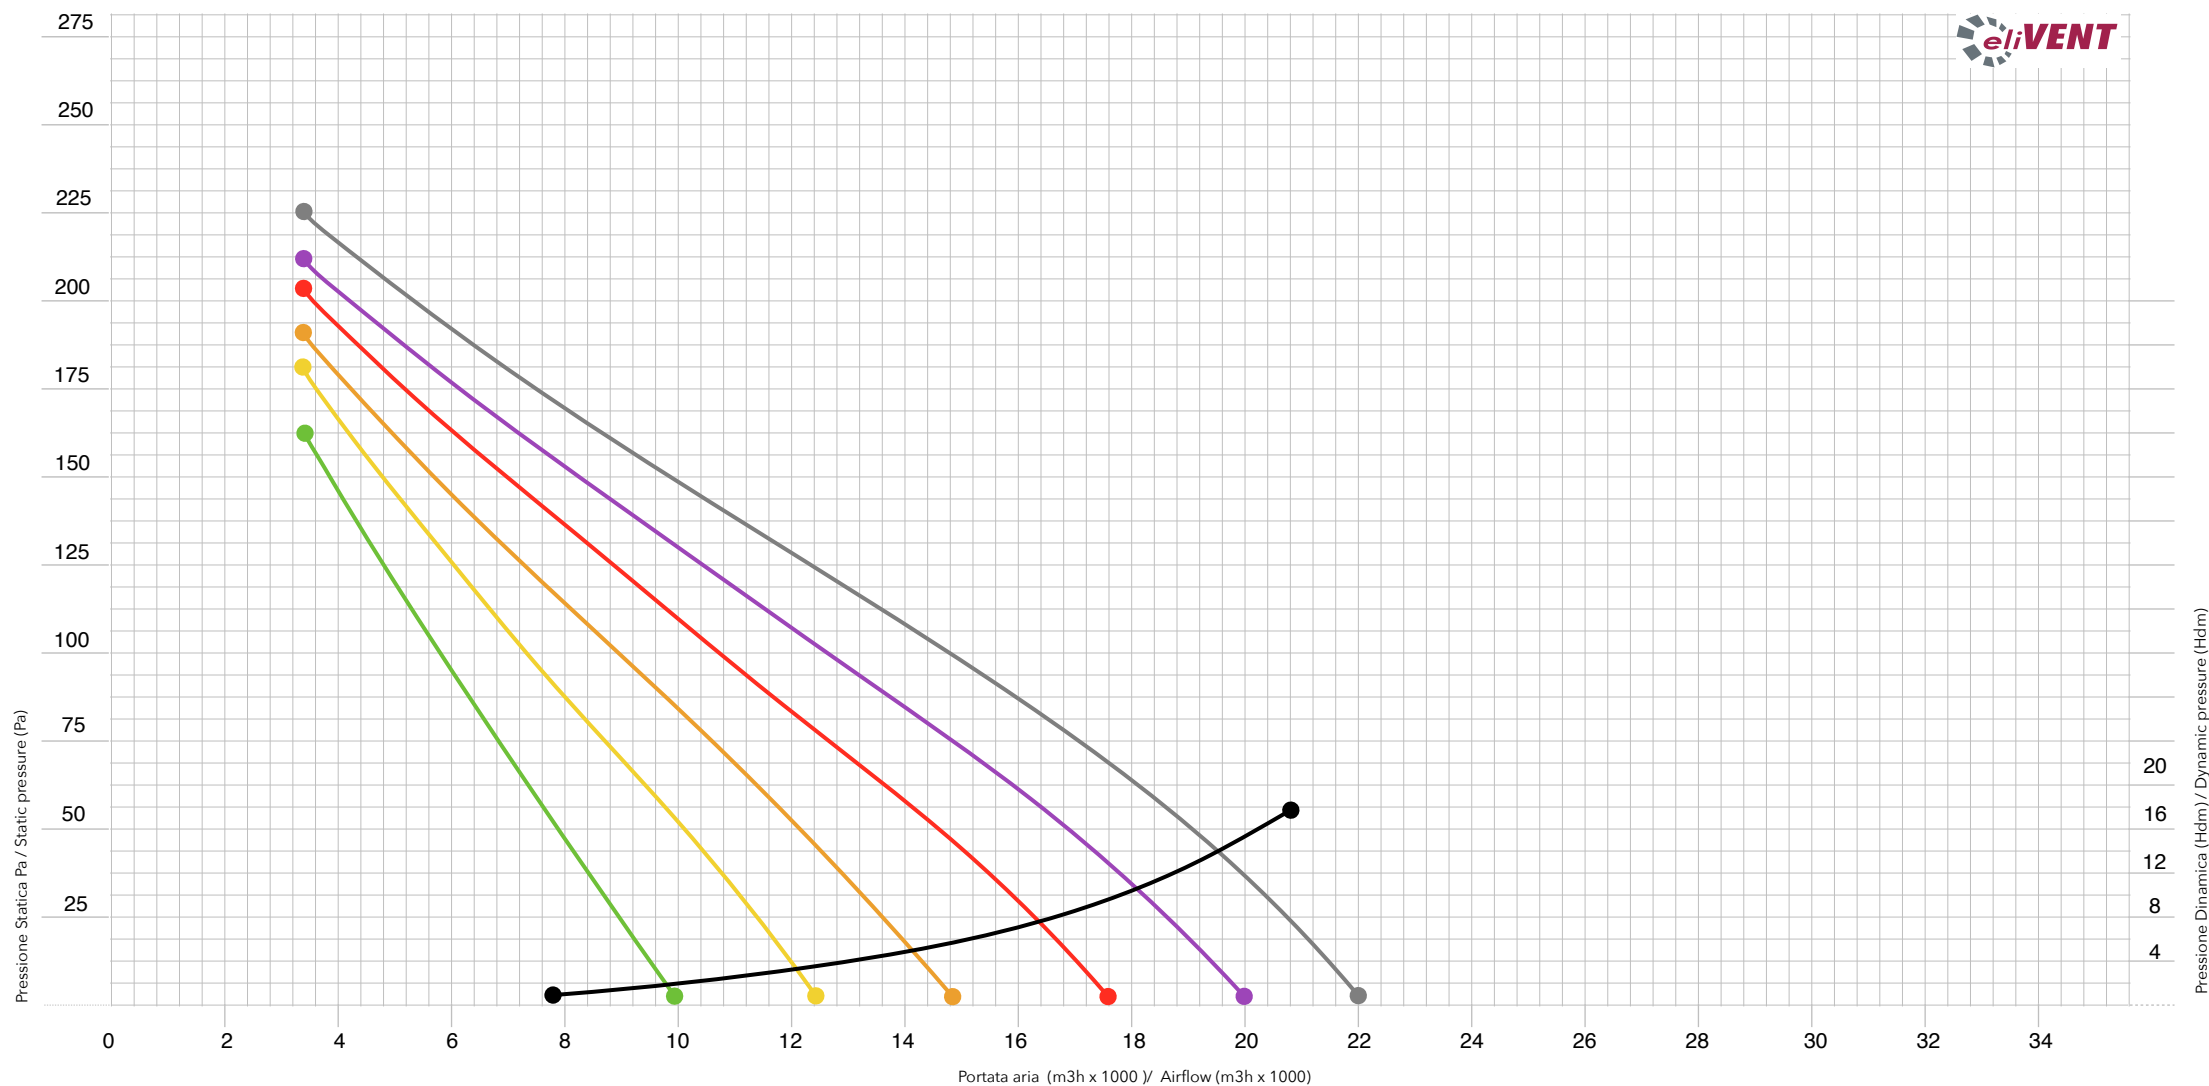

INCLINAZIONE / ANGLE	MAX kW ASSORBITI / MAX kW CONSUMED	RENDIMENTO % / EFFICIENCY %	PRESSIONE SONORA dB(A) 3 m / SOUND PRESSURE dB(A) 3 m	VEL. ARIA BOCCA LIBERA m/s / AIR VEL.FREE OUTLET m/s
15°				
20°	0,20	38/49	74 + - 3	5,90
25°	0,28	41/52	74 + - 3	7,30
30°	0,39	45/54	75 + - 3	8,70
35°	0,62	46/57	76 + - 3	10,40
40°	0,81	49/62	77 + - 3	11,80
45°	1,09	51/66	78 + - 3	13,00
50°				

Mod. Girante / Fans Mod	Diametro / Diameter (mm)
ELI 258 AL	700
Tipo pala / Blade type	Nr. pale / qty. Blade
PA7/REV/AL	8
Rpm - Rpm	Periferica / Peripheral (U)
950	34,8194
Temperatura / temperature	Densità / density (Kg/m3)
23° C	1,225
Peso / weight (Kg)	PD2
7,840	0,9604